


Piston Check Valve

Stainless Grade 316

Features

- BSP threaded ends
- Maximum pressure 800PSI / 55Bar
- Maximum working temperature 230°C
- PTFE seal maximum temperature 250°C

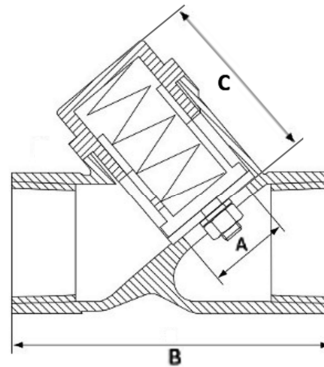

Dimensions

Unit: mm (unless stated otherwise)

| Size | 6.35 1/4" | 9.53 3/8" | 12.7 1/2" | 19.05 3/4" | 25.4 1" | 31.8 1 1/4" | 38.1 1 1/2" | 50.8 2" | 63.5 2 1/2" | 76.2 3" |
|------|--------------|--------------|--------------|---------------|------------|----------------|----------------|------------|----------------|------------|
| A | 11.6 | 12.5 | 12.5 | 18 | 23.5 | 31.4 | 35.7 | 45.5 | 60 | 76 |
| B | 65.5 | 65.5 | 65.5 | 75.5 | 90.5 | 111 | 121 | 151 | 190 | 220 |
| C | 31 | 31 | 31 | 40 | 50 | 55 | 70.5 | 87 | 118 | 136 |
| Code | SPCV06 | SPCV09 | SPCV12 | SPCV20 | SPCV25 | SPCV30 | SPCV40 | SPCV50 | SPCV65 | SPCV75 |



Y Strainer

Stainless Grade 316

Features

- BSP threaded ends
- Maximum pressure 800PSI / 55Bar
- Maximum working temperature 230°C
- Stainless steel body and mesh
- No seal

"Replacement mesh filters available"

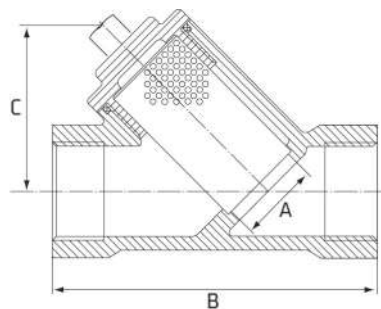

Unit: mm (unless stated otherwise)

Dimensions

| Size | 6.35 1/4" | 9.53 3/8" | 12.7 1/2" | 19.05 3/4" | 25.4 1" | 31.8 1 1/4" | 38.1 1 1/2" | 50.8 2" | 63.5 2 1/2" | 76.2 3" | 101.6 4" |
|--------------|--------------|--------------|--------------|---------------|------------|----------------|----------------|------------|----------------|------------|-------------|
| A | 10 | 12 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 78 | 100 |
| B | 65 | 65 | 65 | 80 | 90 | 105 | 120 | 140 | 180 | 200 | 240 |
| C | 39 | 39 | 39 | 45 | 52 | 58 | 72 | 80 | 96.5 | 118 | 155 |
| D | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| E | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Code (Valve) | SYS06 | SYS09 | SYS12 | SYS20 | SYS25 | SYS30 | SYS40 | SYS50 | SYS65 | SYS75 | SYS100 |
| Code (Mesh) | SYSM06 | SYSM09 | SYSM12 | SYSM20 | SYSM25 | SYSM30 | SYSM40 | SYSM50 | SYSM65 | SYSM75 | SYSM100 |

