



**HEIGHT
SAFETY**

ESSENTIAL HARNESS

PART NUMBER: **H101PK**

**McGrath
Foundation**

DESCRIPTION

LINQ McGrath Foundation Essential Harness

FEATURES & BENEFITS

- **Pebble Weave Webbing** design provides maximum grip for buckles, eliminating webbing slippage and the need for continual re-adjustment.
- **High Tenacity UV stabilised webbing**, enhances resistance to solvents and UV light degradation.
- **Retro-Reflective Thread** in webbing for improved visibility in low light.
- **Large Dorsal Dee Ring** for easier connection.
- **Closed Loop Webbing system** on rear Dorsal Dee maintains positioning of Dorsal Dee in the event of a fall. Significantly reducing the risk of injury from hardware hitting the back of workers head.
- **Extended Belay Loops** make connection of hardware easier, also maintains absolute front and centre positioning as per AS/NZS requirements.
- **Sub Pelvic Strap** integration along the line of Belay Loops, places the worker away from hardware in the event of a fall, significantly reducing the risk of injury from hardware hitting the worker.
- **Articulated Chest Strap** and shoulder adjustment points, designed for additional user comfort and female users, due to lower positioning of strap.

PRODUCT DETAILS

- AUS/NZ designed and engineered
- Size ranges available - Standard (M - L)
- 2bar 3bar connector buckles
- 10 year life span from date of manufacture



Australian
Standard
AS/NZS 1891.1:2007
Lic: 21481
SAI Global

**McGrath
Foundation**

**\$10 from the sale
of this LINQ Height
Safety Harness will go to
the McGrath Foundation**

AUSTRALIA - 1300 **LINQ** HS (5467 47)

NEW ZEALAND - 0800 **LINQ** HS (5467 47)



**HEIGHT
SAFETY**

ESSENTIAL HARNESS

PART NUMBER: **H101PK**



Webbing Material	Polyester; 45mm; UV Resilient; Solvent Resistant Liqui-pel water guard option available
Buckle Material	Corrosion resistant electrophoresis; high tensile lightweight alloy steel
Fall Arrest Hardware	Drop Forged corrosion resistant electrophoresis, high strength alloy steel
Thread	Polyester; 9.81 Newtons (10kg); Extension at break 19.5%
Stitch Pattern	THETA Pattern combines 313 stitches to exceed 28kN of strength. ASNZ compliant colour contrast
Plastic Material	UV stabilised high density polyethylene
Weight	1.1kg
Web Tenacity	Range: Min 28kN - Max 30kN
Drop Forged Dee Rings	Alloy Steel (standard): 40kN
Buckle Strength	12 to 17kN model dependent; Laser etched or hard marked on buckle

Reading of LINQ instruction manual prior to use is mandatory. Description and specification subject to change without notice.

APPLICATIONS


Fall Arrest, Construction, Ladder, Scaffolding, Warehouse.

STANDARDS

Certified and approved to AS/NZS 1891.1 with "5 Ticks" mark of Certification.



BUCKLE CONNECTORS

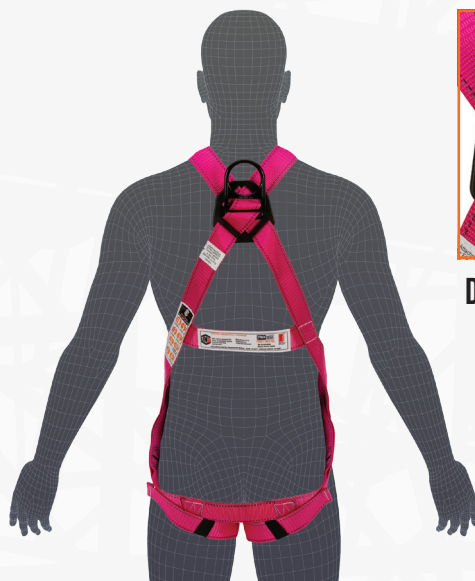

DORSAL DEE RING

