

# Network Video Recorder

## NVR516 Series



## Key Features



- Support Ultra 265/H.265/H.264 video formats
- 64/128-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 2-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI1, HDMI2 and VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Redundant power supply optional
- 2 decoding cards optional, up to 12-ch HDMI
- Support HDD hot swap with RAID 0, 1, 5, 6, 10 storage scheme configurable
- 16 SATA HDDs, up to 8TB for each HDD
- Support 2 miniSAS Interfaces
- Support 12V power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

## Specifications


Model	NVR516-64	NVR516-128
<b>Video/Audio Input</b>		
IP Video Input	64-ch	128-ch
Two-way Audio Input	1-ch, BNC	
<b>Network</b>		
Incoming Bandwidth	384Mbps	512Mbps
Outgoing Bandwidth	384Mbps	
Remote Users	128	
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	
<b>Video/Audio Output</b>		
HDMI/VGA Output	VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI1: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, BNC	
Synchronous Playback	16-ch	
Corridor Mode Screen	3/4/5/7/9/10/12/16/32	
<b>Decoding</b>		
Decoding format	Ultra 265, H.265, H.264	
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	4 x 12MP@20, 4 x 4K@30, 16 x 1080p@30, 36 x 720p@30, 64 x D1	
<b>Hard Disk</b>		
SATA	16 SATA interfaces	
Capacity	up to 8TB for each HDD	
eSATA	1 eSATA interface	
miniSAS	2 miniSAS ports	
<b>Smart</b>		
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking	
VCA Search	Face search, Behavior search	
Statistical Analysis	People counting	
<b>Disk Array</b>		
Array Type	RAID 0/1/5/6/10/50/60	
<b>External Interface</b>		
Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface	
Serial Interface	1 x RS232, 1 x RS485	

USB Interface	Rear panel: 4 x USB3.0
Alarm In	24-ch
Alarm Out	8-ch
Decoding Card (optional)	2 slots (4-ch HDMI or 6-ch HDMI outputs per card)
Power Output	12V
<b>General</b>	
Power Supply	100 ~ 240V AC Power Consumption: ≤ 50 W( without HDD )
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)
Chassis	19-inch rack-mounted 3U chassis
Dimensions	482mm ×477mm × 131mm (18.8"× 19.0" ×5.1")
Weight ( without HDD )	≤ 10 Kg ( 22.05 lb )

## Dimensions

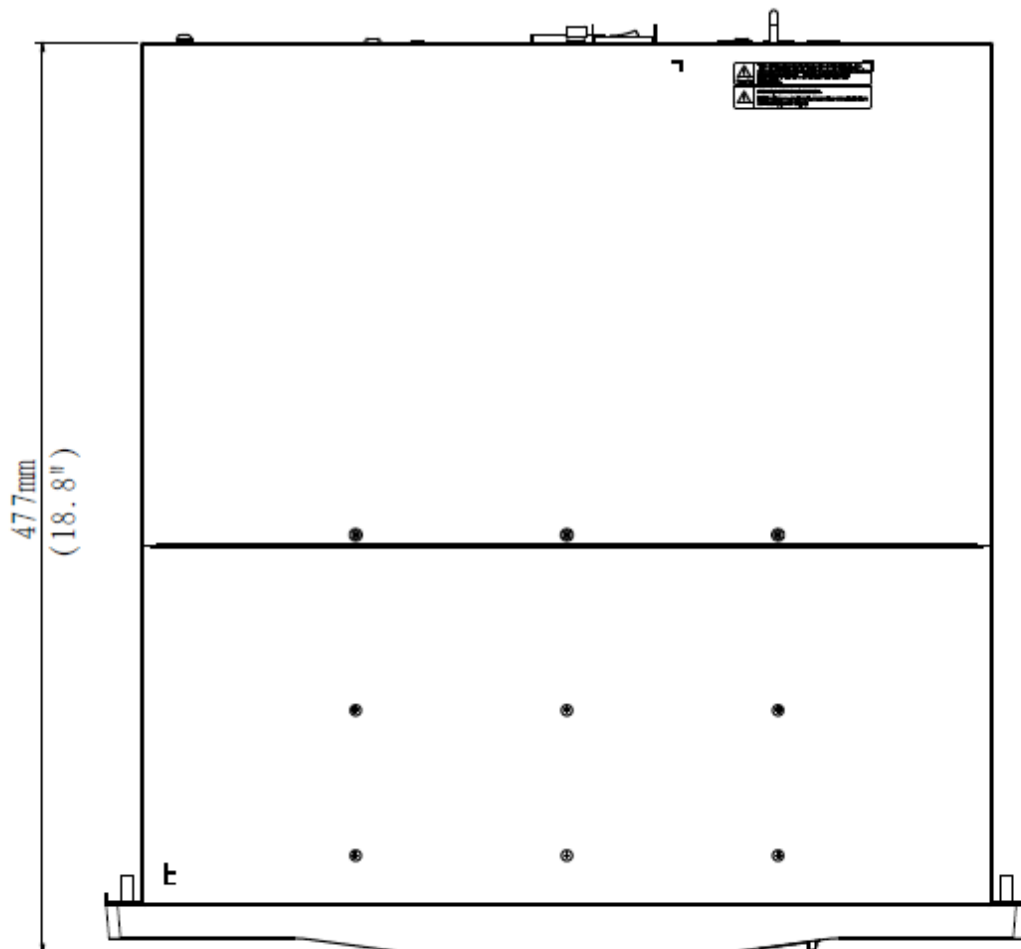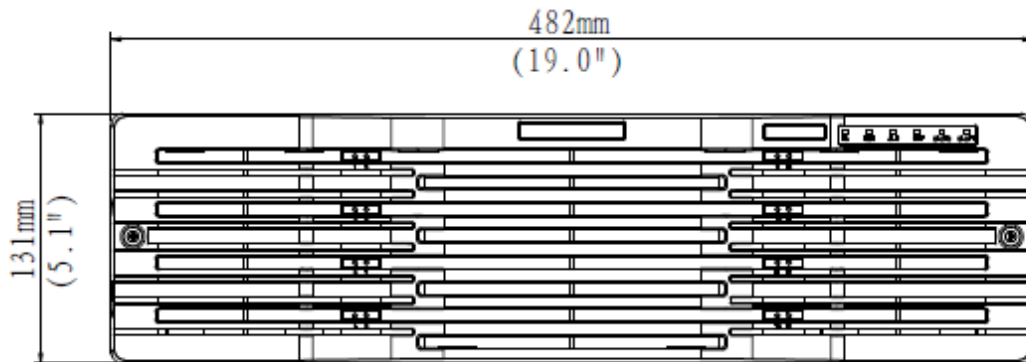

## Rear Panel

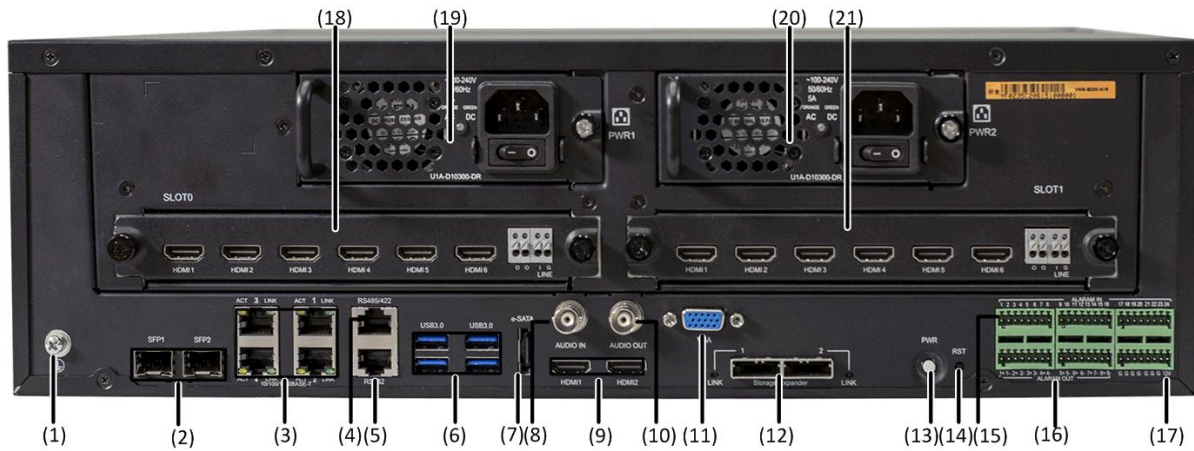

NVR516

(1) GND	(2) SFP Interface	(3) Adaptive Interface
(4) RS485	(5) RS232	(6) USB
(7) eSATA	(8) Audio Input	(9) HDMI Output
(10) Audio Output	(11) VGA Output	(12) miniSAS
(13) Power Button	(14) RST	(15) Alarm Input
(16) Alarm Output	(17) 12V DC Output	(18) Decoding Card 1 (optional)
(19) Power Supply 1	(20) Power Supply 2(optional)	(21) Decoding Card 2 (optional)

### Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://sgcdn.uniview.com>

©2016-2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.