

全自動平板式黏合機 轉印機 OP-54A/54A II /84A/124A


FULLY AUTOMATIC FLAT PRESS AND TRANSFER MACHINE

用途：

- ★ 平織、針織裁片黏合工作及可做襯衫之門襟、長褲之壓平功能。
- ★ 可搭配轉印紙，做轉印工作。
- ★ 上壓板採用防靜電鐵氟龍布，易於清理。
- ★ 特殊的安全保護電路，使人操作不會產生危險。
- ★ OP-54A II 型為下加熱方式。

優點：

- ★ 馬達控制的全自動平板式黏合機。
- ★ 採用特殊加熱器及電子自動調溫器，SSR控制可減少溫度差距範圍，使效率提升。
- ★ 壓力及溫度可由控制面板上輕易操控。

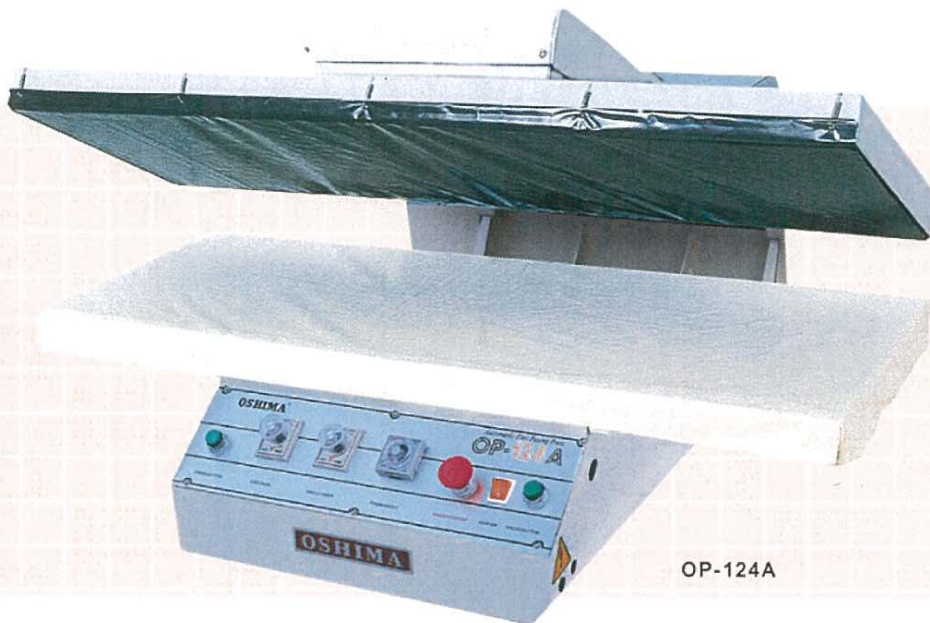

OP-124A

Application：

- ★ Fuse woven/knitted fabrics and press the placket of the shirt and pants.
- ★ Heat Transfer the image paper onto the garment pieces.

Feature：

- ★ Fully automatic flat type press machine with motor-driven.
- ★ Use special heater, electric thermostat and SSR (Solid State Relay) to minimize the temperature difference ranges and improve the thermal efficiency.
- ★ Pressure and temperature can be easily controlled through the control panel.
- ★ The upper flat board uses the anti-static Teflon material for easy cleaning.
- ★ Special safe protective circuit control to avoid the danger while operation.
- ★ OP-54A II type is bottom heating instead of top heating (for embroidery sticker removing)

規格 Specification

| 型號Model | OP-54A | OP-54A II | OP-84A | OP-124A |
|---------------------------------|----------------------|--------------|---------------|---------------|
| 電壓Power Supply | 1P/220V | | | |
| 馬達功率Motor | 0.25KW | | | |
| 電熱功率Heater | 2.85KW | 2.85KW | 4.2KW | 4.2KW |
| 最大壓力 Max Pressure | 10kg/cm ² | | | |
| 設定溫度Temperature | 0~200℃ | | | |
| 工作面積Working Area (mm) | 500×400 | 500×400 | 800×400 | 1200×400 |
| 黏合時間Fusing Time | 0~30secs | | | |
| 機體尺寸L×W×H Dimensions(mm) | 660×1000×500 | 660×1000×500 | 800×1000×500 | 1200×1000×500 |
| 裝箱尺寸L×W×H Packing Volume(mm) | 1120×880×680 | 1120×880×680 | 1140×1200×680 | 1360×1120×680 |
| 淨重/毛重N.W / G.W | 190/225kgs | 190/225kgs | 205/240kgs | 235/280kgs |