



H-D® EAGLE METAL LOCKER

Assembly Instructions

Congratulations on your purchase of a H-D® Eagle Metal Locker. The utmost care has gone into the design and manufacturing of this product.



READ ALL ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING

INSPECT ALL CONTENTS TO VERIFY ALL PARTS ARE INCLUDED AND UNDAMAGED

ALL BOLTS SHOULD BE INSERTED FROM THE OUTSIDE OF LOCKER AND ATTACHED WITH NUT FROM INSIDE

3/8" WRENCH IS REQUIRED FOR ASSEMBLY AND IS NOT INCLUDED

Parts List


Qty	Description and Size
1	Top Panel
1	Bottom Panel
2	Side Panels
1	Back Panel
1	Door Panel
1	Shelf
60	Nuts & bolts
2	Hooks (2 single, 1 double)



H-D, Harley, Harley-Davidson and the Bar & Shield Logo are among the trademarks of H-D Michigan, LLC. ©2016. All Rights Reserved. Manufactured by Ace Product Management Group, Inc. under license from Harley-Davidson Motor Company.

For a dealer near you call toll free 1-800-588-2743 in the USA and Canada or use our dealer locator at www.harley-davidson.com

Ace Product Management Group, Inc.
Milwaukee, WI U.S.A.

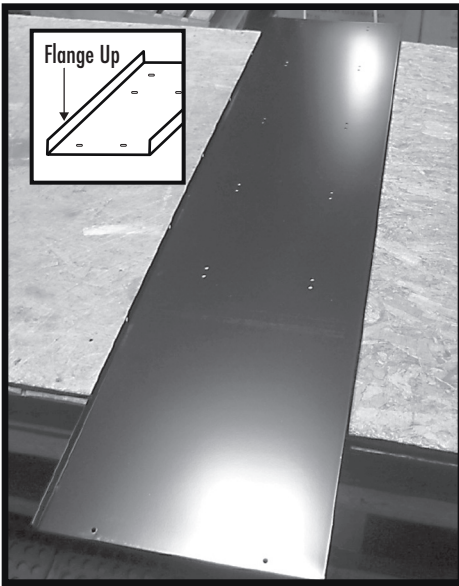


Step 1: Place Back Panel on a flat surface with flanges facing upwards as shown.

NOTE: The holes in the center of the back closest to the edge will be the top of the locker.




Step 2: Line up the holes in the center of the Side Panel with the center of the Back Panel. Attach sides using the Nuts and Bolts provided.

NOTE: Bolts should be inserted from the Outside of the Locker & Nut should be tightened from the Inside.

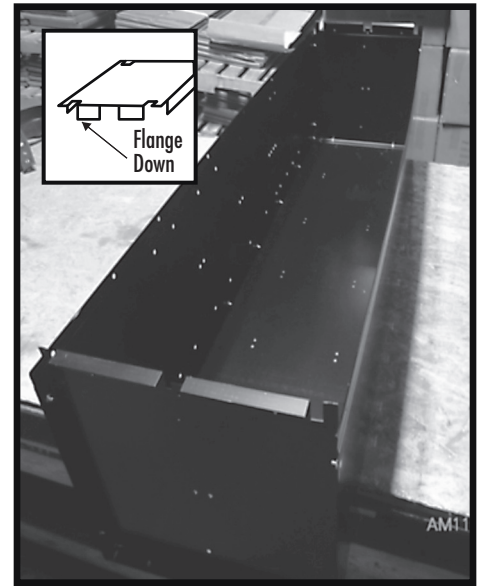


Step 3: Attach Top and Bottom Panels to the Side Panels and Back Panel with flange facing downward as shown. Secure with nuts and bolts.

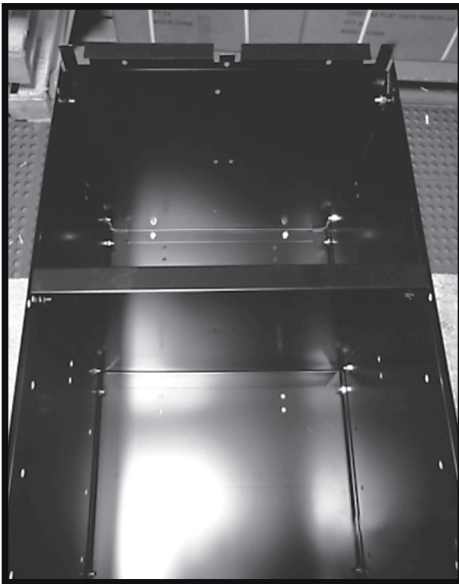

Step 4: Attach Shelf using the Nuts and Bolts. Tighten securely.

NOTE: There are multiple locations to attach the shelf. Use the ones that best fit the application.

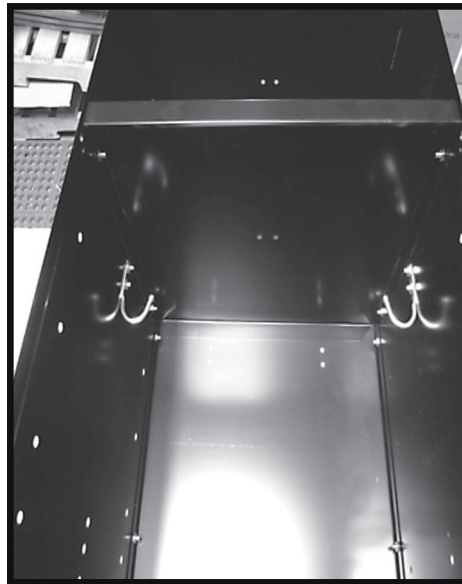

Step 5: Attach Double Hook to bottom of the shelf. Attach Single Hook to Side Panels using Nuts and Bolts. Tighten Securely.



Step 6: Attach Door by sliding the Door Panel over the other Panels. Secure with Nuts and Bolts. Double check ALL Nuts and Bolts for Tightness.

NOTE: AFTER ASSEMBLY, THE LOCKER WILL NOT BE STABLE. ATTACH TO WALL USING THE HOLES PROVIDED IN THE BACK OF THE LOCKER. USE HARDWARE APPROPRIATE FOR WALL TYPE.

WARRANTY

Free replacement of any part that fails within 90 days from date of purchase, excluding shipping costs. Void if damaged by misuse, accidents, alterations, failure to follow instructions, fire, flood, and acts of God.

If you have any questions or comments, please contact us at: **BrandedProducts.com**