

POLIFAN® CURVE

For use on fillet welds & hard to reach areas



VERTRAU BLAU

Trust In The Blue


- New ceramic grit disc for an extreme cool grind that suits stainless steel
- High stock removal performance through un-rivalled fast and aggressive grinding
- Suits AS/NZ 1554.5 applications



Vibration Filter



Noise Filter



Emission Filter



Haptic Filter

Polifan® CURVE

For use on fillet welds & hard to reach areas



CURVE - Zirconia

Abrasive: Zirconia alumina Z
Grit size: 40

Workpiece materials:
Suits Mild Steel, stainless steel (INOX)



Description	Article Number	Grit size	Disc Thickness [mm]	D x H [mm (Inch)]	Max. speed [RPM]	
Radial type PFR						
PFR 115 Z 40 SGP-CURVE M/22,23	67689032	40	10	115 x 22,23 (7/8)	13.300	10
PFR 115 Z 40 SGP-CURVE L/22,23	67689042	40	16	115 x 22,23 (7/8)	13.300	10
PFR 125 Z 40 SGP-CURVE M/22,23	67689052	40	10	125 x 22,23 (7/8)	12.200	10
PFR 125 Z 40 SGP-CURVE L/22,23	67689062	40	16	125 x 22,23 (7/8)	12.200	10




CO-CURVE - Ceramic

The ceramic grit guarantees extremely cool grinding on poor heat conducting materials, which means optimum grinding results without thermal damage to workpiece.

Abrasive: Ceramic oxide CO
Grit size: 60

Workpiece materials:
Stainless steel (INOX), steel

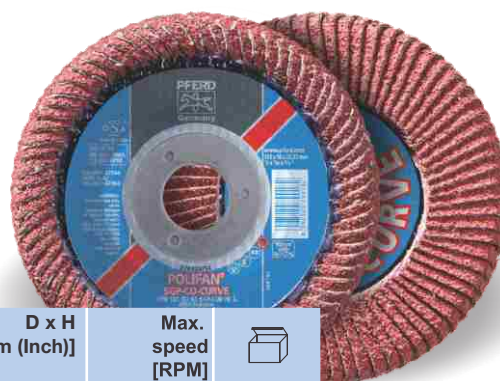

Description	Article Number	Grit size	Disc Thickness [mm]	D x H [mm (Inch)]	Max. speed [RPM]	
Radial type PFR						
PFR 115 CO 60 SGP-CURVE M/22,23	67689036	60	10	115 x 22,23 (7/8)	13.300	10
PFR 115 CO 60 SGP-CURVE L/22,23	67689046	60	16	115 x 22,23 (7/8)	13.300	10
PFR 125 CO 60 SGP-CURVE M/22,23	67689056	60	10	125 x 22,23 (7/8)	12.200	10
PFR 125 CO 60 SGP-CURVE L/22,23	67689066	60	16	125 x 22,23 (7/8)	12.200	10




CURVE - Aluminium

Contains no fillers that might leave undesirable residues on the aluminium workpiece. The ground surface can be welded right away, without any further treatment.

Abrasive: Aluminium oxide A-Cool
Grit size: 40

Workpiece materials:
Aluminium, non-ferrous metals

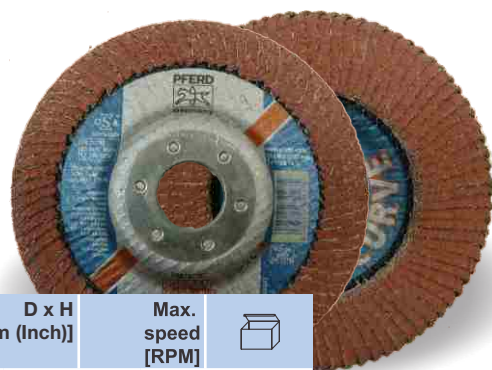

Description	Article Number	Grit size	Disc Thickness [mm]	D x H [mm (Inch)]	Max. speed [RPM]	
Radial type PFR						
PFR 115 A 40 SGP-CURVE L ALU/22,23	67689048	40	16	115 x 22,23 (7/8)	13.300	10
PFR 125 A 40 SGP-CURVE L ALU/22,23	67689068	40	16	125 x 22,23 (7/8)	12.200	10

Safety Recommendations



Wear Safety Glasses



Wear Ear Muffs



Wear Dust Mask



Wear Gloves



Read Instruction Manual



Do Not Use If Damaged

PFERD HEAD OFFICE
1-3 Conifer Crescent
Dingley VIC 3172
1300 0 PFERD
Phone: (03) 9565 3200
Fax: (03) 9565 3299
www.pferd.com.au
sales@pferd.com.au

PFERD New South Wales
43 Bentley Street
Wetherill Park NSW 2164
Phone: (02) 9725 1833
(02) 9725 1873
Fax: (02) 9756 1663

PFERD Queensland
82 Rosedale Street
Coopers Plains QLD 4108
Phone: (07) 3323 1800
Fax: (07) 3323 1899

PFERD South Australia
Suite 44, 283-287
Sir Donald Bradman Drive
Brooklyn Park SA 5032
Phone: (08) 8238 3483
Fax: (08) 8238 3477

PFERD Western Australia
Unit 2/13 Canvale Road
Canningvale WA 6155
Phone: (08) 9455 6055
Fax: (08) 9455 6010

PFERD Tasmania
Alltrade Agencies
10 Mountain View Place
Penguin TAS 7316
Phone: 0409371225
Fax: (03) 6437 1332

PFERD Northern Territory
R.R. Enterprises
Unit 11, 41 Georgina Crescent
Palmerston NT 0831
Phone: (08) 8931 1411
Fax: (08) 8932 5525